

Purpose of Study (Aim & Objectives)


Aim

To set up an **End-to-End Early Warning System** to reduce the intensity of floods and resultant flood damage to Surat city under ACCCRN Phase III.

Objectives

- To improved reservoir operations to minimize peak floods caused by extreme precipitation events in Upper and Middle Tapi basin.
- To better prepare institutions and society to handle flood emergencies (including tidal creeks floods).



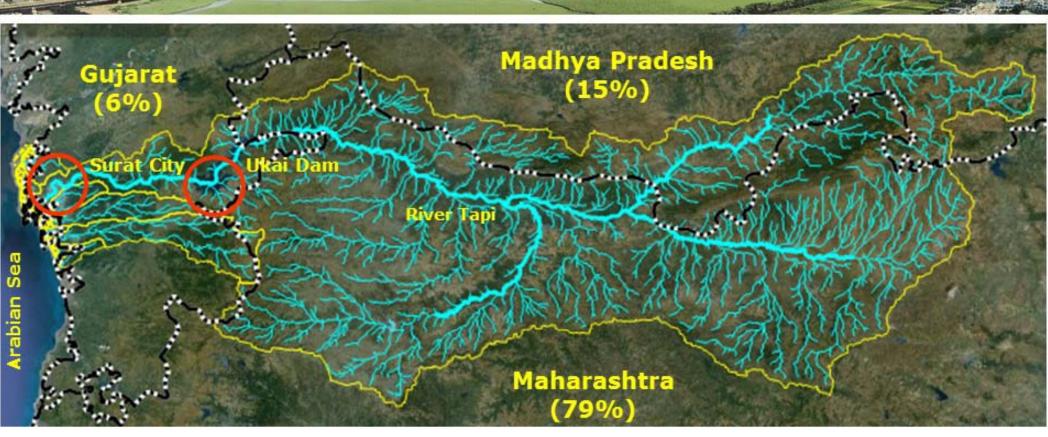

Area: 326.5 Sq. Km (Source: SMC)


• Population: 2.8 Million (Census 2001, Source: SMC)

• Avg. Rainfall: Avg. 1143 mm (Source: CDP)

Major River: Tapi River

Slum Pockets: 312 (Nos.)

lapi River & Ukai Reserveir

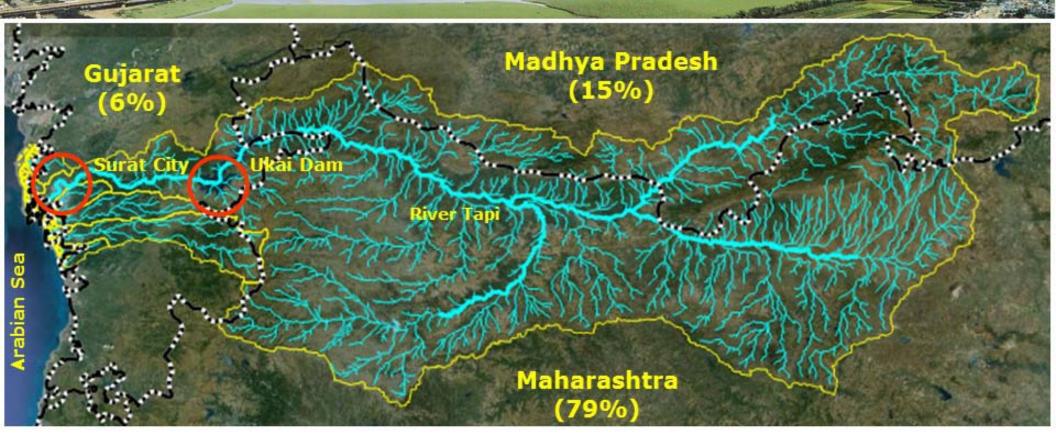

River Length

Reservoir Type

Distance from Surat

Total Catchment

Command Area

724 Km before falling in the Arabian Ocean

Earthen & masonry dam

90 Km (Upstream of Surat)

65,145 Sq. km

4.11 Lac Ha. (2007-08)

History of Flood in Surat

Sr. No.	Flood Event	Discharge (Lakh Cusecs)	Water Level at Hope Bridge (M)	Period
1	1883	10.0	11.0	July
2	1884	8.4	10.0	September
3	1894	8.0	10.3	July
4	1942	8.6	10.6	August
5	1944	11.8	11.3	August
6	1945	10.2	11.0	August
7	1949	8.4	10.4	September
8	1959	12.9	11.6	September
9	1968	15.5	12.0	August
10	1994	5.2	10.1	AugSep.
11	1998	7.0	11.4	September
12	2006	9.0	12.4	August

Source: Agnihotri, P. et al., 2008

Surat Flood Risk


Surat experiences two kinds of floods: Fluvial & Khadi Flood


- Tapi River Floods (Fluvial Flood): Cause

- Monsoon depression: From Bay of Bengal (travelling East to West) concentrating flow along Tapi Basin (very high variation),
- Need for managing maximum water level: To meet competing nonmonsoon water demand resulting in minimal flood cushion in the dam,
- Settlements: either side of the river banks (major land-use change in last 2 decades) in Surat,
- Human induced topography and hydrological changes: industrial development, embankments, bridges and weir,
- Rise in river bed: Sedimentation load with slope and its deposition.


Surat Flood Risk

- Khadi (Tidal Creeks) Floods: Cause
- Combination of Pluvial Floods, with
- Tide effect in Low Elevation Coastal Zone (10 m.)

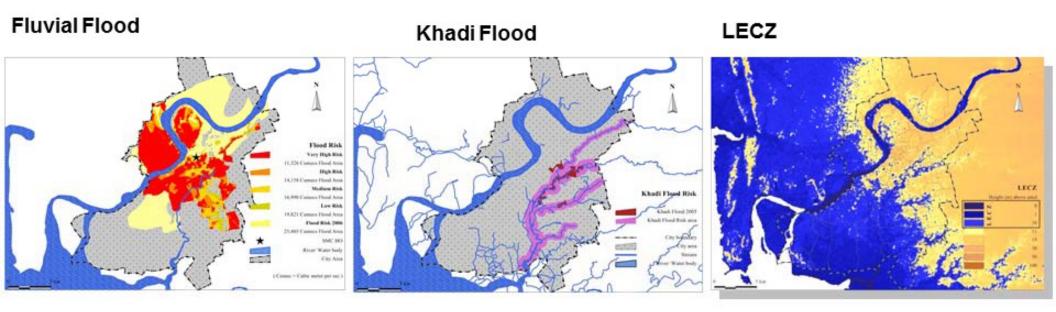


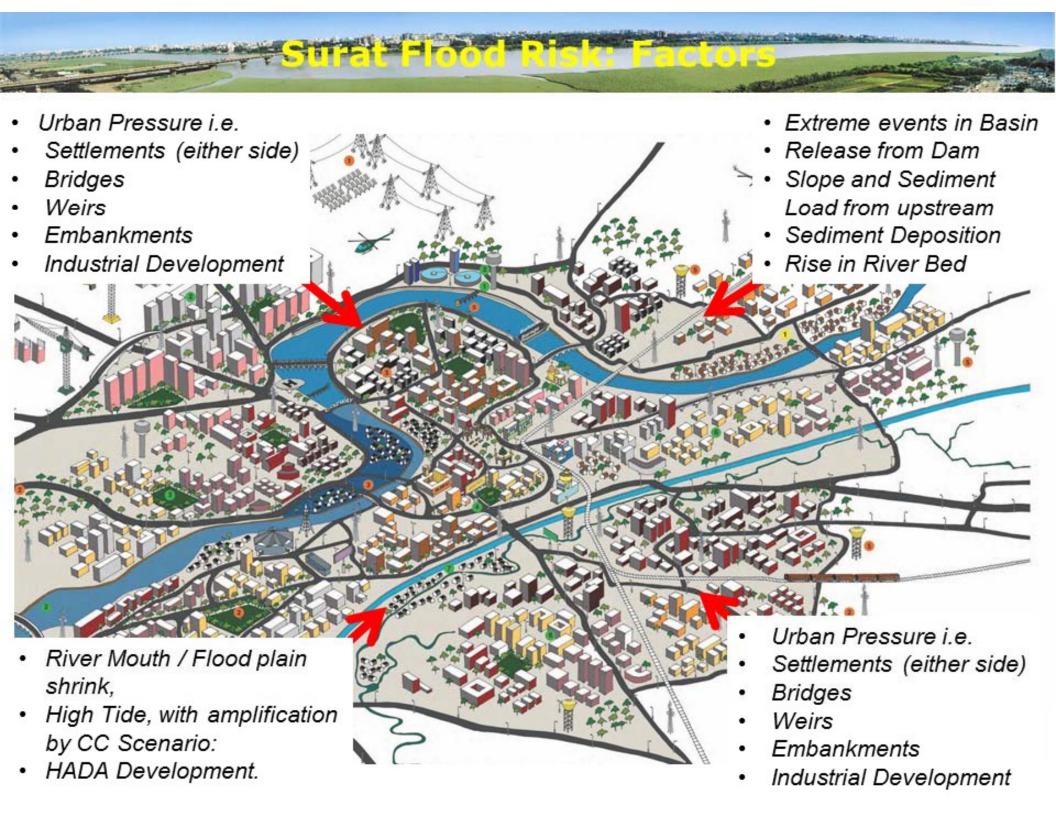

Floors and Human Induced Topography

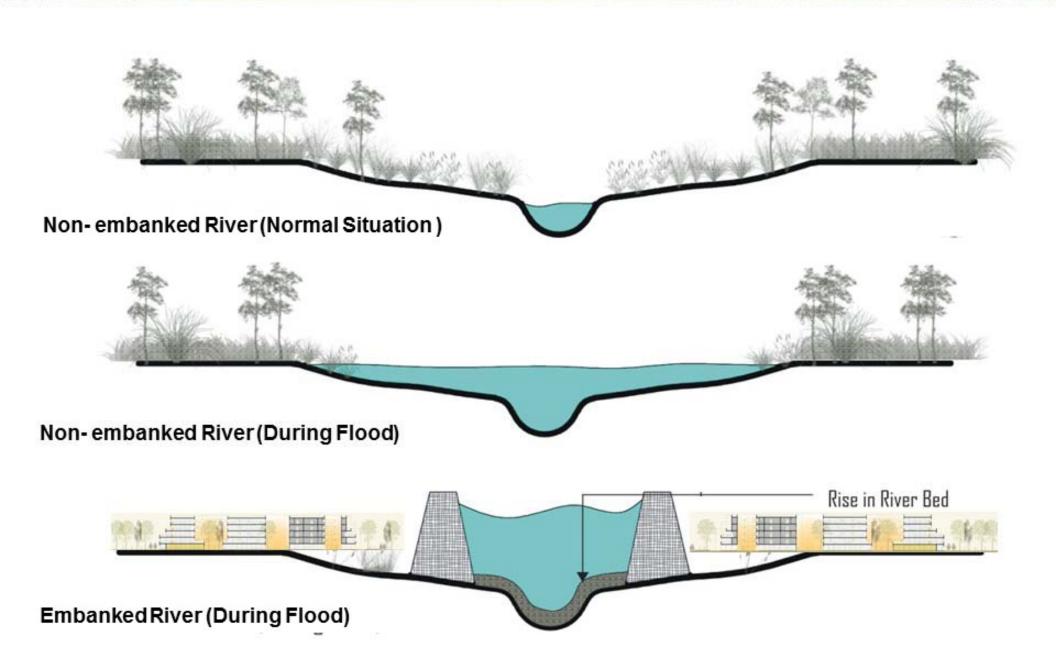



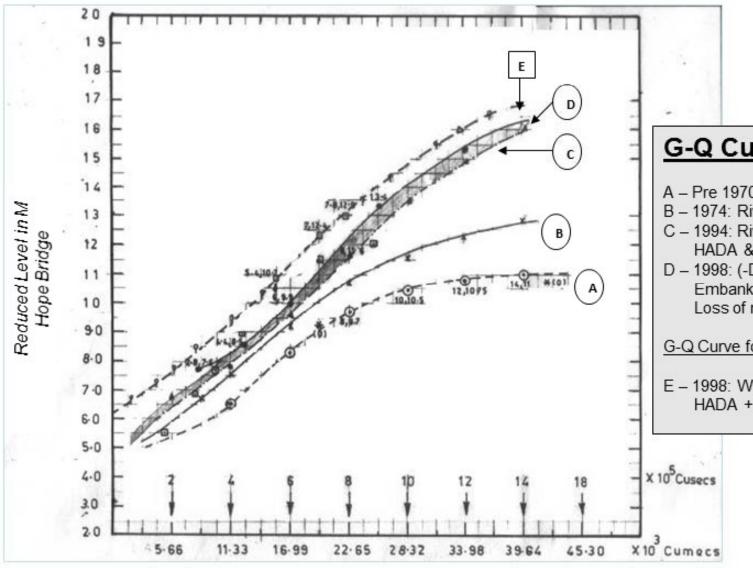

G-Q Curve for Hope Bridge:

- A Pre 1970: Virgin River
- B 1974: River + Patches of Dykes (Pala)
- C 1994: River + 50 % Dykes + Infrastructure of HADA & land use in Right bank flood plain
- D 1998: (-Do-) + Bridges + Railway & Road Embankment Hazira + Extension of HADA + Loss of natural drain etc.


G-Q Curve for Weir:

E - 1998: Weir Singanpore 1998 + More Dykes + HADA + Right Bank City + Bridges

Discharge (X 105 cusecs)


Source: ACCCRN Surat Flood Risk Management Report 2010

<u> Burata Blood</u> Discharge vs Area & Population Afficeted

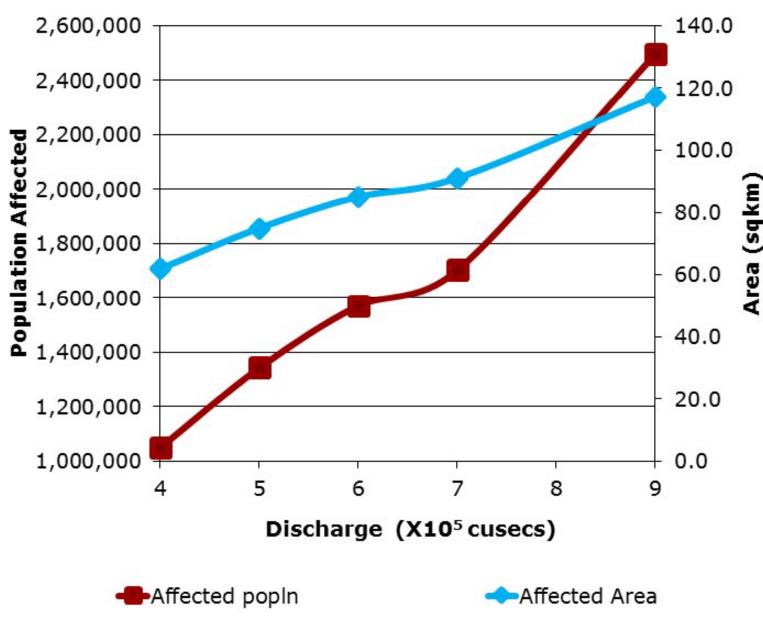

Source: TARU Analysis

Current Interstate Flood Warning System (CWC and NWRWS)

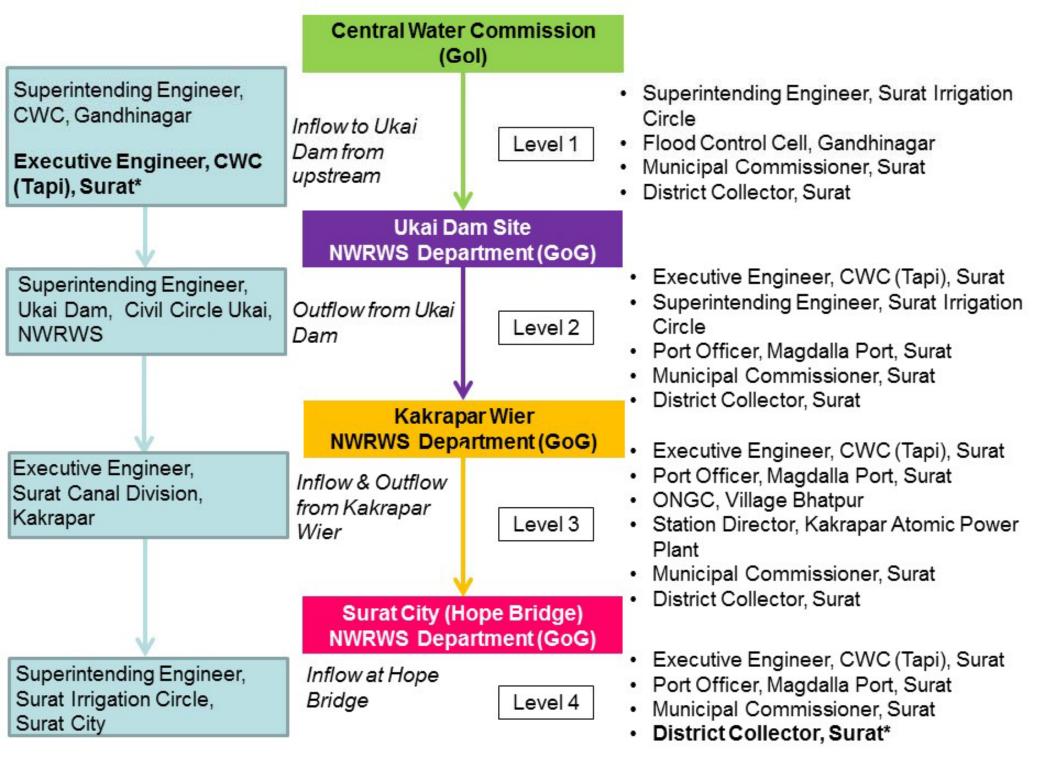

End-to-End Early Warming System

End-to-End EWS:

"Empower individuals communities and administration, threatened by natural hazards, to act in sufficient time and in an appropriate manner so that reduce the possibility of personal injury, loss of life and damage to property, or nearby and fragile environments". (UN, 2006)

Elements of effective and complete End-to-End Early Warning System:

- Risk knowledge,
- Technical monitoring, risk assessment and warning,
- Dissemination & communication of meaningful warnings to those at risk,
- Response capability public awareness and preparedness to act.


End-to-End EWS Suratu Benefits


Increase respite time,



- Provides timely and effective information on flood hazard,
- Can reduce hazard intensity (by controlled release from dam),
- Can stop hazard convert into disaster,
- Reduce magnitude of disaster (timely evacuation, preparedness),
- Support administration to prepare for effective last mile response well in advance.

Englished EWS Surate Methodology

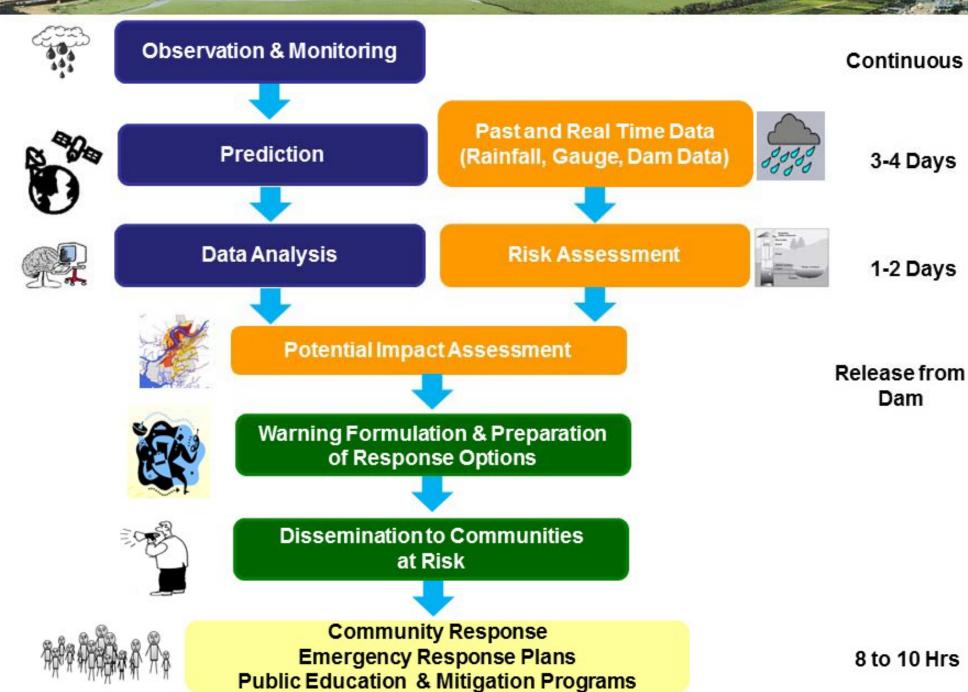

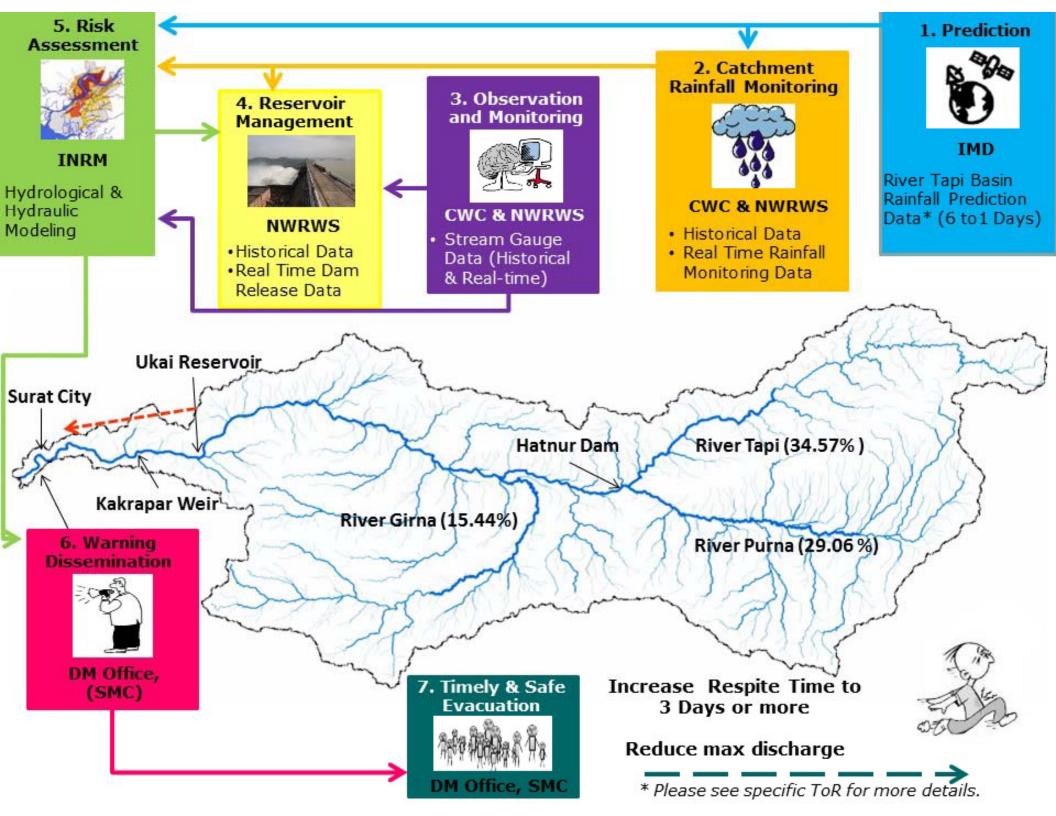

Current Monitoring System: CWC

Tapi Division of the Central Water Commission (CWC) maintains:

- 18 rainfall monitoring (rain gauge) stations,
- 11 Gauge-discharge sites in Tapi catchment,
- 8 of the above sites have Sediment Observations,
- 3 flood forecasting stations in the Tapi basin.


Source: CWC, India

End to End EWS Surat: Main Steps


Main Steps


- 1. Engagement with city stakeholders to set up:


- Surat Climate Change Trust (SCCT)
- 2. Climate change informed flood modeling,
- 3. Early warning and disaster management system,
- 4. Information and support to vulnerable,
- 5. Ensuring sustainability of the system beyond project period.

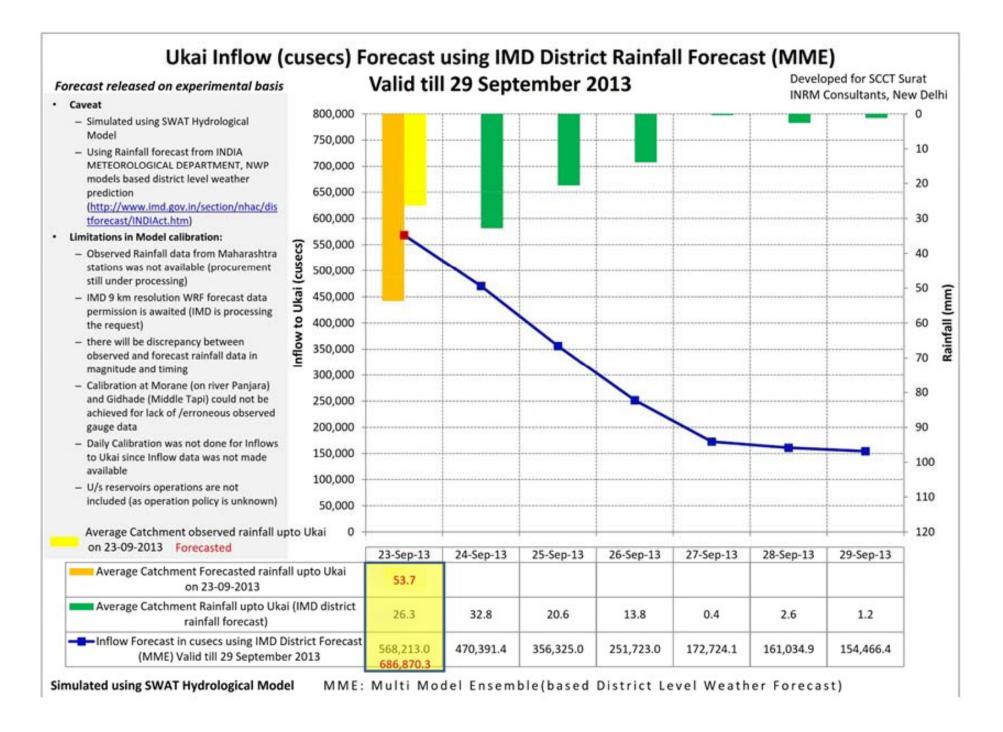



Ward Level Flood Atlas

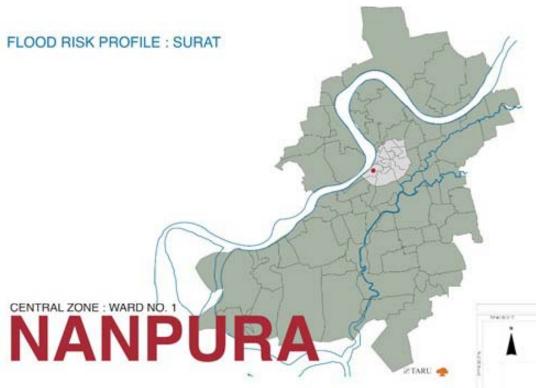


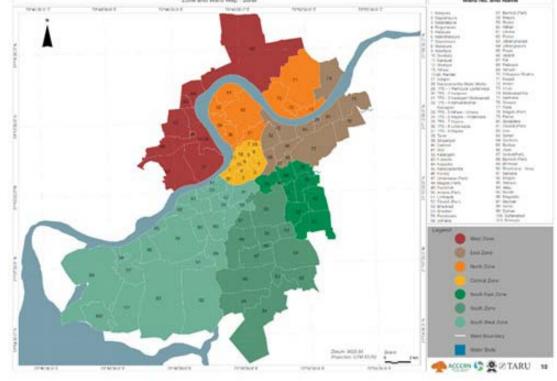

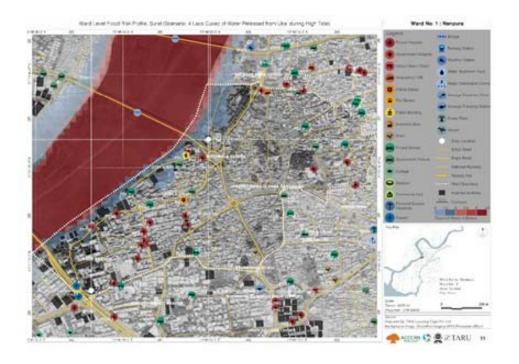

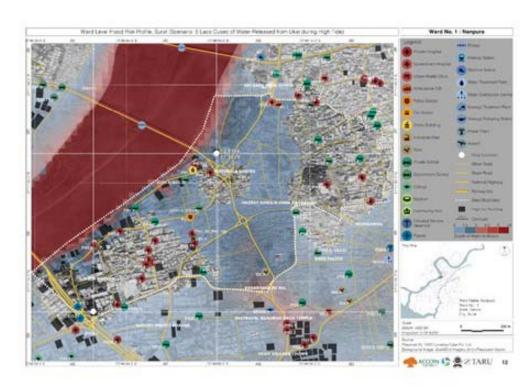

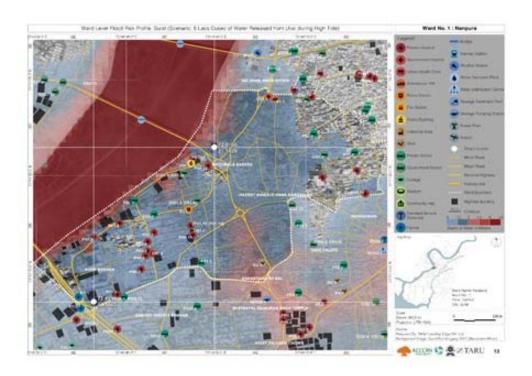

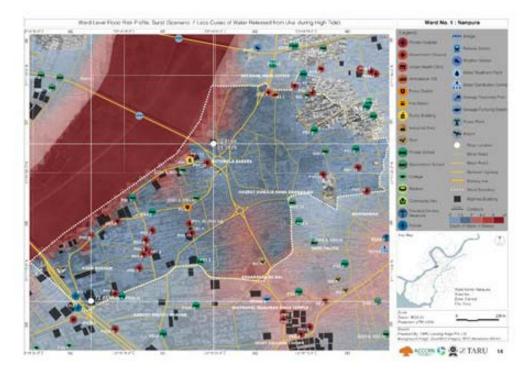



Lamp Post Number :MS17 (Surat Municipal Corporation)

Lat: 21.19982723

Long: 72.8205567


0-10 Lac Cusec

10.1-12 Lac Cusec

> 12 Lac Cusec




Web Based DSS

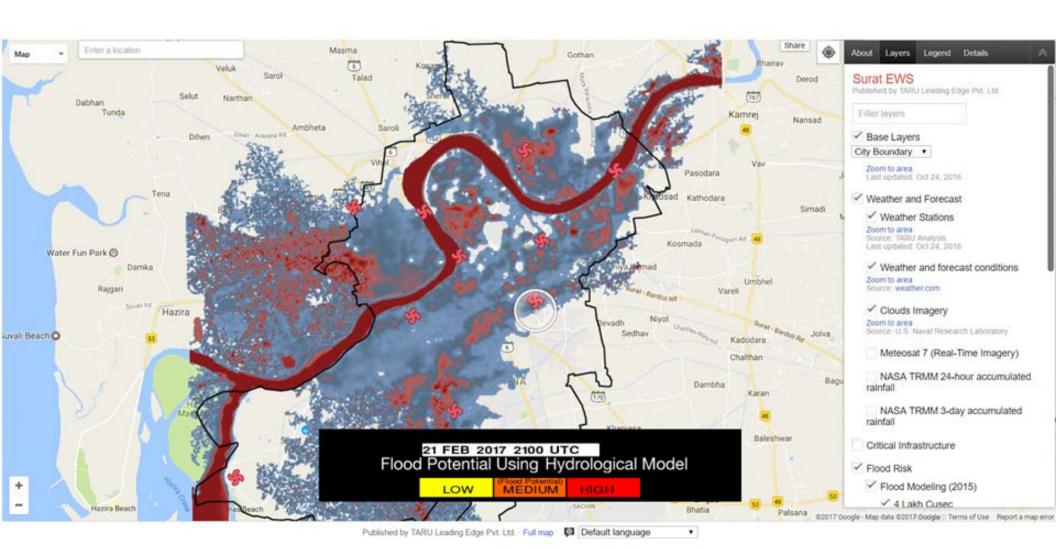





FLOOD RISK PROFILE, SURAT

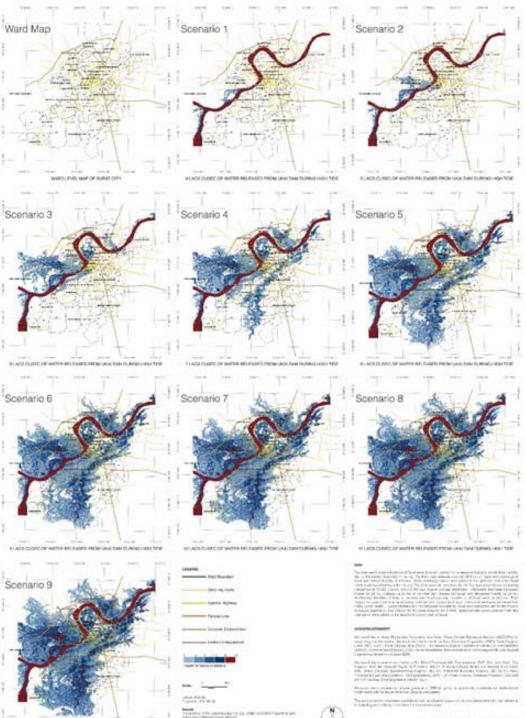

III LACE CUSTO OF BATTER RELEASED FROM LIKELTHIN THERE HIS LITTLE

Lessons: Technical

- Urban floods are combined effect of
 - Precipitation
 - "Hydromorphology"
 - Human interventions
- Climate change may amplify/cause unforeseen impacts
- Look forward- look backwards
 - Antecedent build up of events important
 - Kedarnath Example*- build up over days
 - Tomorrows Precipitation should be seen in context of yesterday an today
- Adding human interventions perspective to meteorological events
 - Consequence of failure
 - · Network integrity vs single road- Kedarnath
 - Drainage issues in Urban areas

Same event in different contexts can cause different outcomes

Efforts such as GDACS- Population in >X intensity area will help gain attention of
decision makers

Thomson M &, Warburton M 1985 Uncertainty on a Himalayan Scale: Michael Thompson and Michael Warburton Mountain Research and Development Vol. 5, No. 2 (May, 1985)

Technical LL

- Entry points for technical analysis in urban areas
 - Include Climate risk analysis in
 - urban planning & city management
 - Nature needs flood plains, Planners should know peak floods to develop options
- In-depth analysis of events to learn lessons
 - Research to go beyond the obvious (afforestation??)
 - Exploring real causes and feasible solutions
 - Paradigm shifts (Search for clumsy solutions to wicked problems*)
- Defining extremes for different contexts
 - Temperature, rainfall etc.
 - Defining area specific "droughts"
- Opportunities to directly serve users
 - Meteorology health linkages: Heat Action plans- HVAC advisories
 - Pluvial flood advisories for cities
 - Rainwater harvesting Technical support
 - Energy sector, esp. Roof top solar, Other major generating stations
 - Smart cities??>> Smart indoor climate management> Energy savings

^{*}VerWeij, M. et al 2006 Clumsy Solutions For A Complex World: The Case Of Climate Change. Public Administration Volume 84, Issue 4, pages 817–843, December 2006

Lessons loarntuinstitutions

- Understand stakeholders (Industry, Trade, Civil society, Academic insttns)
 - e.g. Maharashtra and MP govts. SMC DC IMD CWC NWRWS SVNIT, IITD, GSDMA, SGCCI, Citizens, Farmers, Hazira Industries, Kakrapar power station
- Build ownership among stakeholders,
- Create/strengthen multi-stakeholder institutions to own the work and ensure sustainability
- Build local capacities to
 - Understand multiple facets of the issue (flood is not just high flow, but results
 of pressures from various sources)
 - Read the advisories/warnings
 - Developing systems for "Living with floods": Buildings, preparedness
 - Transcending boundary of sectors and disciplines needed.
- Last mile reach and knowledge gaps
 - Capacity building of SDMA and ULBs
 - ULBs unable to understand (VH rainfall, unless one says, flooding possible/ how much?)
 - Breaking the silos
- Crowd sourcing a challenge and opportunity for fine-tuning thermal comfort models and health impacts (Smart city opportunities)

Lets work together for Sustainable Safe Surat

